山东康贝特食品包装机械有限公司

SHANDONG KANGBEITE FOOD PACKAGING MACHINERY CO., LTD.

总部地址：山东省诸城市高新技术开发区密州东路 5999 号
总部电话：0536-6083899　传真：0536-6083799

Head office address:No.5999 MizhouEast Road, Zhucheng City,Shandong Province
Head office phone: 0536-6083899　Fax: 0536-6083799

www.kangbeite.com

业务 QQ：952344475　邮箱：kangbeite@163.com
邮编：262200

Business QQ: 952344475　E-mail: kangbeite@163.com
Postal code: 262200

国际贸易部
Overseas Trading Department

网址：kbtpacking.com
电话：+86 150 0662 1108
邮箱：admin@kbtfoodpack.com

Website: kbtpacking.com
phone: +86 150 0662 1108
E-mail : admin@kbtfoodpack.com

广东分公司 Guangdong Branch	联系电话：13791654101 Contact phone：13791654101	福建分公司 Fujian Branch	联系电话：15006621168 Contact phone：15006621168
湖南分公司 Hunan Branch	联系电话：15006563158 Contact phone：15006563158	四川分公司 Sichuan Branch	联系电话：15726062138 Contact phone：15726062138
河南分公司 Henan Branch	联系电话：15006621358 Contact phone：15006621358	东北分公司 Dongbei Branch	联系电话：19806212218 Contact phone：19806212218
上海分公司 Shanghai Branch	联系电话：15006621378 Contact phone：15006621378	新疆分公司 Xinjiang Branch	联系电话：19806211638 Contact phone：19806211638
		河北分公司 Hebei Branch	联系电话：19806211898 Contact phone：19806211898

康贝特®
KANG BEI TE

康贝特 食品包装机械 专业制造商

Kangbeite Food Packaging Machinery

400-081-8887

设计　研发　生产　服务

康贝特
KANG BEI TE

拉伸膜包装机专业制造商——康贝特

Professional Manufacturer of thermoforming Packaging Machines —— KANGBEITE

公司网站

公众号



Company Profile
企业简介

山东康贝特食品包装机械有限公司坐落于山东半岛中部，中国恐龙之乡山东诸城。公司是一家专业生产、设计、研发、制造真空包装机的大型企业。

Located in Zhucheng City,known as "Home of Dinosaur"in middle part of Shandong Peninsula,Shandong, China,Shandong Kangbeite Food packaging Machinery Co.,Ltd. is a major enterprise specialized in the production,design,R&D and manufacture of vacuum package machine.

公司自主研发生产的全自动拉伸膜包装机、全自动热成型气调包装机、全自动真空气调包装机、全自动贴体包装机畅销国内外，受到国内外用户的广泛赞誉。公司坚信市场是第 一 导向，根据市场用户的要求，公司先后研发出各类包装机型用于各种生熟肉制品、水产品、蛋制品、豆制品、休闲食品等，填补了国内设备需进口的空白。

The company independently develops and produces fully automatic thermoforming packaging machines, thermoforming modified atmosphere packaging machines, vacuum modified atmosphere packaging machines, and vacuum skin packaging machines. These products are well sold both at china and abroad and highly praised by customers worldwide.Guided by the market demand, the company has successively developed various packaging machines suitable for raw and cooked meat products, aquatic products, egg products, soybean products, leisure foods and other products. These innovations have filled the domestic gap that once depended on imported equipment.









公司是最早与德国专家和国内高等院校合作研发全自动拉伸膜真空包装机和全自动真空气调包装机的大型专业制造商，始终关注国际同类产品最先进的技术， 在国内一 直保持真空包装机领域领先地位。公司研发的全自动热成型气调包装机、全自动热成型真空贴体包装机、全自动拉伸膜 真空包装机 (充氮包装机) ，设备采 用世界名牌日本三菱电器、日本 SMC 气动元件、德国普旭真空系统 BUSCH， 设备远销美国、英国、加拿大、澳大利亚、沙特、越南、马 来西亚、新加坡、香港、东南亚等国家和地区。经过大量用户使用，设备已达 到国际先进水平。

As one of the earliest large-scale professional manufacturers, the company cooperated with German experts and domestic universities in the R&D of fully automatic thermoforming vacuum packaging machines and fully automatic vacuum modified atmosphere packaging machines. We always keep up with the most advanced technologies of international similar products and maintain a leading position in the domestic vacuum packaging machine industry. The company's products include fully automatic thermoforming modified atmosphere packaging machines, fully automatic thermoforming vacuum skin packaging machines, and fully automatic thermoforming vacuum packaging machines (nitrogen filling machines). The equipment adopts world-famous brand components such as Mitsubishi Electric (Japan), SMC pneumatic parts (Japan), and Busch vacuum systems (Germany) BUSCH.Our products are exported to the United States, the United Kingdom, Canada, Australia, Saudi Arabia, Vietnam, Malaysia, Singapore, Hong Kong, and other countries and regions in Southeast Asia. Verified by numerous users, our equipment has reached the international advanced level.



Enterprise Culture
企业文化

企业精神：
Enterprise Spirit

- 追求卓越 奉献社会
  pursuit of excellence, dedication to society

经营原则：
Business Principles

- 明理诚信 精益求精
  honesty and constant improvement

发展方针：
Development Guideline

- 以质量、创新求生存
  seek survival by quality and innovation

经营理念：
Management Idea

- 精耕细作、步步为营、稳中求进、图变求新、诚信创新、协作共赢。
  以精英团队塑造企业文化；以优秀员工创造管理名牌
  以管理精品推进规模发展；以规模扩展追求企业效益
  intensive cultivation,step-based consolidation,constant improvement in stability,pursuit of change and innovation,innovation with integrity,win-win cooperation.
  Mould enterprise culture by the elite team;Create management famous brand by excellent employees
  Boost scale development by managing boutique;Pursue enterprise revenue by scale expansion

公司价值观：
Company Value

- 以顾客的满意、员工自我价值的实现和社会的进步为最大价值所在。
  highlight customers satisfaction,employees self-worth realization and society improvement



Corporate Team
企业团队

公司拥有一支认真务实、团结进取、勇于创新、高效率的团队，自成立以来始终遵循“以质量求生存，以信誉求发展”的创业宗旨，不断加大科研投入，创新产品，完善技术及售后服务。高质量的产品和完善的售后服务是我们永远的承诺，我们将竭尽所能，与用户一起发展，以倡导节能、高效为己任，以杰出企业为目标，对品质永无止境的追求。

我们在赶超世界领先食品包装机水平的征途上，仍然任重而道远，将以精耕细作、步步为营、稳中求进、图变求新、诚信创新、协作共赢的经营观，真诚与广大国内外客户合作，互惠双赢，共创辉煌！





The Company has a diligent, pragmatic, united, enterprising, innovative and highly efficient team. Since its establishment, we have always adhered to the business philosophy of "Seeking Survival by Quality, Pursuing Development by Reputation". We have continuously increased investment in scientific research, innovated products, and improved technology and after-sales service. High-quality products and perfect after-sales service are our eternal commitment. We will do our utmost to develop together with customers, take advocating energy conservation and high efficiency as our responsibility, aim to become an outstanding enterprise, and pursue quality relentlessly.

Although it is an arduous task and the road is long for us in the process of catching up with and surpassing world-leading food packaging machine brand,however,we wil take as bases the business philosophies of intensive and careful management,advancing gradually and entrenching ourselves at every step,making progress while ensuring stability,striving for changes while advancing ourselves,being sincere and honest while seeking changes,and cooperating harmoniously with others to obtain the win for all,and at the same time,on these bases,we will cooperate with the customers at home and abroad to obtain reciprocal benefits and to achieve brilliant achievements.











Enterprise Qualification
企业资质

本企业被认定为高新技术企业，已通过 GB/T19001-2016/ISO9001:2015 质量管理体系认证；GB/T24001-2016/ISO14001:2015 环境管理体系认证，产品通过 CE 认证，经公司多年的不懈努力，产品销量在同行业一直处于领先地位。

The enterprise has been recognized as a high-tech enterprise and has obtained GB/T 19001-2016 / ISO 9001:2015 Quality Management System Certification and GB/T 24001-2016 / ISO 14001:2015 Environmental Management System Certification.Our products have obtained CE certification. Through years of unremitting efforts, our products have maintained a leading position in the industry.


























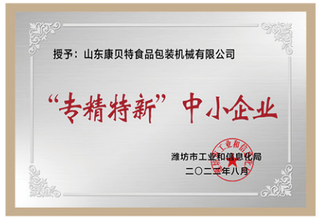





Cooperative customers
合作客户

品质成就卓越，康贝特人的宗旨就是生产出高品质的产品并广泛服务于客户。不断进取、勇于拼搏、精益求精的康贝特人自始至终都不敢有丝毫懈怠，一直在食品机械行业领域不断进取与创新，努力把康贝特建设成行业领军企业和世界知名品牌！

Quality achieves excellence.It is the mission of Kangbeite people to produce high-quality products and serve customers extensively.Forging ahead, daring to strive, and pursuing perfection relentlessly, Kangbeite staff have never slackened their efforts.We keep forging ahead and innovating in the food machinery industry, striving to build Kangbeite into an industry leader and a world-famous brand!

安井 Anjoy · 新希望集团 NEW HOPE GROUP · 正大集团 CHIA TAI GROUP · 北纬47° · 咚咚 · 绝味
雨润 yurun · 统一企业 · 得利斯 Delicious · 东阿阿胶 · 良品铺子 · 润成 RUNCHENG
骆洋食品 · 千禧村 · 沈师傅 SHEN SHIFU · 百年堂 BENETON · 老娘舅 · 康笑
紫燕 · 老城南 · 渔米之湘 · GUO LIAN 国联水产 · 恒兴集团 EVERGREEN GROUP · 紫鑫
利口福 · 佳宝食品超级市場 · 宇仔 · 翔宇食品 · ZJRAINBOW 虹宝

公司排名不分先后

DRZ-520
全自动连续拉伸膜真空包装机

THERMOFORMING VACUUM PACKAGING MACHINE

设备简介

我公司经过多年研制开发了 DRZ-520、DRZ-420、DRZ-320 连续拉伸真空包装机，改写了国内 20 多年来全靠进口设备的历史，完全替代进口。

Equipment introduction

The DRZ-520, DRZ-420 and DRZ-320 continuous thermoforming vacuum packaging machines, developed by our company through years of dedicated efforts,have ended China's 20-year reliance on imported equipment.These products can fully replace imported models.

使用范围

适用于对各种休闲食品、豆制品、肉制品、水产品、果蔬、酱菜、冷却肉、医药产品、五金元件、医疗器械等进行真空、充气、贴体包装。

Scope of Application

They are applicable to vacuum gas-filled skin packaging of diverse leisure food, bean products, meat products, aquatic products, fruit and vegetables, pickled vegetables, chilled meat, pharmaceutical products, hardware, medical apparatus and instruments, etc.

控制系统

采用日本三菱可编程控制器控制，三菱伺服，三菱触摸屏及三菱温度模块等，全部采用日本、欧洲、中国台湾等电器。设有完善的安全保护措施，带有故障报警和解除故障分析原因及故障复位功能。

Control System

It adopts Japanese Mitsubishi PLC control, and is equipped with Mitsubishi servo drives, Mitsubishi touch screens, Mitsubishi temperature modules and other components.All electrical appliance are imported from Japan, Europe, Taiwan, China, etc.The machine is equipped with complete safety protection, featuring fault alarm, fault cause analysis and fault reset functions.

功能

1. 光电跟踪采用美国邦纳，可选用彩盖膜或光膜进行包装，准确精度高，提高产品档次。
2. 采用组合模具更换方便、一机多用，模具备有冷却系统，整体模具为铝合金板镂空，对产品的成型、真空热封具有良好的效果。
3. 可以根据用户产品包装要求，配备自动打码、喷码系统或激光喷码系统。
4. 根据用户产品包装要求，在抽真空的基础上，可以充入氮气或混合气体进行包装。
5. 配有世界一流德国BUSCH（普旭）真空泵，真空度高、质量稳定、耐用可靠。
6. 采用中国台湾 TYC 链条，适用于各种厚度的软膜、硬膜及半硬膜的拉伸成型，可以进行特殊包装。
7. 备有边角废料回收系统，保持环境卫生。
8. 采用先进的横切、纵切系统、电脑调刀。

Equipment function

1. Photoelectric tracking uses American Banner sensors, enabling packaging with color film or transparent film. It features high precision and helps enhance product quality.
2. The application of the combined assembling die ensures convenient replacement and realizes the "one machine for multiple applications" function.The entire die is equipped with a cooling system and is hollowed integrally from an aluminum alloy plate, which facilitates product forming and vacuum heat sealing.
3. An automatic coding or inkjet spraying system can be installed according to the user's packaging requirements.
4. According to the user's packaging requirements, nitrogen or mixed gas can be filled after vacuum pumping.
5. The equipment is equipped with a world-class German (Busch) BUSCH vacuum pump, which features a high vacuum level, durability, reliability and stable quality.
6. The equipment adopts a TYC chain from Taiwan, China, which is suitable for stretching and forming soft, hard, and semi-hard films of various thicknesses, and can achieve specialized packaging.
7. There is a corner waste material recovery system, which can keep a clean environment.
8. Equipped with an advanced horizontal and vertical cutting system, which enables computer-controlled cutter adjustment.



技术参数 Technical parameters

名 称	Name	参 数
上膜宽（mm）	Top film width	496-497
下膜宽（mm）	Bottom film width	522-523
真空度（pa）	Vacuum degree	≤ 200
压缩空气（Mpa）	Compressed air pressure	≥ 0.6
动力接口（mm）	Power interface	Φ16PU 管
冷却水（Mpa）	Cooling water	≥ 0.15
电源（三相五线制）	Power supply(Customized)	380V/50HZ（可定制）
总功率（kW）	Total power	约 15
工作效率（min）	Work efficiency	6-8 次
整机重量（kg）	Total weight	约 2700
外形尺寸（mm）	Outline dimension	约 8200×1100×1860

康贝特机械 驰名中外
KANGBEITE MACHINERY-
WORLD RENOWED

DRZ-420/320
全自动拉伸膜真空包装机

THERMOFORMING VACUUM PACKAGING MACHINE



技术参数 Technical parameters

名 称	Name	参 数
上膜宽（mm）	Top film width	296/396-297/397
下膜宽（mm）	Bottom film width	322/422-323/423
真空度（pa）	Vacuum degree	≤ 200
压缩空气（Mpa）	Compressed air pressure	≧ 0.6
动力接口（mm）	Power interface	Φ16PU 管
冷却水（Mpa）	Cooling water	≧ 0.15
电源（三相五线制）	Power supply(Customized)	380V/50HZ（可定制）
总功率（kW）	Total power	约 12
工作效率（min）	Work efficiency	6-8 次
整机重量（kg）	Total weight	约 2200
外形尺寸（mm）	Outline dimension	约 6800×1100×1860




性能优点
Performance benefits



废料回收系统
Waste material recovery system

备有边角废料回收系统，保持环境卫生。

There is a corner waste material recovery system, which can keep a clean environment.



输送带出料
Conveyor belt discharge

产品不易损坏，包装方便。

Products are not easy to be damaged and the packing is convenient



全不锈钢架体
All-stainless steel frame.

彻底抛弃拼装架体，采用整体侧板支架机构，直线度更好，强度更高，稳定性更好。


Adopt the integral side plate support mechanism, which has better straightness, higher strength and better stability.



快换纵切刀
Quick changing of longitudinal knife

变换品种时，更换整个纵切刀只需 5 分钟，设有报警系统。


When converting the variety, changing the whole longitudinal knife only needs 5 minutes and is equipped with alarm system.



气缸封口定位系统
Air cylinder sealing positioning system



伺服移动喷码系统
Servo-driven mobile inkjet coding system



独立多连自锁升降系统
Independent multi-link self-locking lifting system

MAP-420/520
全自动热成型真空气调包装机

THERMOFORMING MAP PACKAGING MACHINE (RIGID TRAY)

设备简介

1、根据用户产品要求定制模具尺寸。
2、采用日本三菱操作系统，包含人机界面、伺服电机、可编程控制器、温控模块、运动模块。
3、采用德国 BUSCH（普旭）真空泵，抽气速率快，真空度高，残氧量指数低。
4、采用世界知名品牌中国台湾 TYC 夹膜链条。
5、进口光电对标 (美国邦纳) 跟踪系统，可用彩盖膜，保证图案位置对正。
6、根据用户包装要求，可配备自动喷码、打码、激光喷码，贴标机等标识系统。
7、采用组合模具，主体框架采用 304 不锈钢制作。
8、根据用户包装要求，可以填充氮气和混合多元气体。

Equipment introduction

1. Customize the mold size according to the user's product requirements.
2. It adopts Mitsubishi operating system, including human-machine interface, servo motor, programmable controller, temperature control module and motion module.
3. German BUSCH vacuum pump is adopted, with fast pumping rate, high vacuum degree and low residual oxygen index.
4. The world famous brand TYC film clamping chain from Taiwan, China are adopted.
5. The imported photoelectric benchmarking (Banner) tracking system uses color cover film to ensure accurate pattern alignment.
6. According to the user's packaging requirements, it can be equipped with automatic code spraying, code printing, laser code spraying labeling machine and other identification systems.
7. The main frame is made of 304 stainless steel.
8. According to the user's packaging requirements, nitrogen and mixed multi-element gas can be filled.

技术参数
Technical parameters

名 称	Name	参 数
上膜宽（mm）	Top film width	395-396
下膜宽（mm）	Bottom film width	422-423
真空度（pa）	Vacuum degree	≤ 200
压缩空气（Mpa）	Compressed air	≧ 0.6
动力接口（mm）	Power interface	Φ16PU 管
冷却水（Mpa）	Cooling water	≧ 0.15
电源（三相五线制）	Power supply(Customized)	380V/50HZ（可定制）
总功率（kW）	Total power	约 15
工作效率（min）	Work efficiency	5-8 次
整机重量（kg）	Total weight	约 2300
外形尺寸（mm）	External dimension	约 7000×1100×1860







VSP-420
全自动热成型真空贴体包装机

THERMOFORMING VACUUM SKIN PACKAGING MACHINE











设备简介

1、根据用户产品要求定制模具尺寸。
2、采用日本三菱操作系统，包含人机界面、伺服电机、可编程控制器、温控模块、运动模块。
3、采用德国 BUSCH（普旭）真空泵，抽气速率快，真空度高，残氧量指数低。
4、采用世界知名品牌中国台湾 TYC 夹膜链条。
5、根据用户包装要求，可配备在线打印贴标机等标识系统。
6、采用组合模具，主体框架采用 304 不锈钢制作。

Equipment introduction

1. Customize the mold size according to the user's product requirements.
2. It adopts Mitsubishi operating system, including human-machine interface, servo motor, programmable controller, temperature control module and motion module.
3. German BUSCH vacuum pump is adopted, with fast pumping rate, high vacuum degree and low residual oxygen index.
4. The world famous TYC From Taiwan China film clamping chain is adopted.
5. According to the packaging requirements of users, online printing and labeling machine and other identification systems can be equipped.
6. The main frame is made of 304 stainless steel.

技术参数
Technical parameters

名 称	Name	参 数
上膜宽（mm）	Top film width	422-423
下膜宽（mm）	Bottom film width	422-423
真空度（pa）	Vacuum degree	≦ 200
压缩空气（Mpa）	Compressed air	≧ 0.6
动力接口（mm）	Power interface	Φ16PU 管
冷却水（Mpa）	Cooling water	≧ 0.15
电源（三相五线制）	Power supply(Customized)	380V/50HZ（可定制）
总功率（kW）	Total power	约 15
工作效率（min）	Work efficiency	5-8 次
整机重量（kg）	Total weight	约 2300
外形尺寸（mm）	External dimension	约 7000×1100×1860

KBT-550/650
全自动连续真空气调包装线

FULL-AUTOMATIC CONTINUOUS VACUUM MODIFIED ATMOSPHERE PACKAGING LINE

设备简介

本系列设备适合于包装生鲜肉类、水产、熟卤食品（如卤味家禽、素食品）、盒饭、面包糕点等。经过气调包装的食品，保持了食品原有的口感、色泽、形状及营养，同时结合自身的食品工艺可达到较长的保鲜期。客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

Equipment introduction

This series of equipment is suitable for packaging fresh meat,aquatic products,cooked marinated food (such as braised poultry,vegetarian dishes). box meals,bread and pastry,etc.Foods packaged by modified atmosphere packaging (MAP) retain their original taste, color, shape and nutrition. Combined with our unique food processing technology, a long shelf life can be achieved.Customers can also have equipment customized by our company according to the actual packaging shape and production capacity requirements.

性能优点

1、采用日本三菱可编程控制器，由可编程序控制器（PLC）配合触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。
2、光电跟踪盖膜图案，确保包装印刷图案的完整，保证成品率。
3、整机采用 304 不锈钢，不锈钢框架结构，比铝板拼接强度高，稳定好，不易变形。
4、封口圈采用进口硅脂整体加工，寿命终生免维护，封口花纹平整。
5、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，可根据用户盒型配置。
6、采用世界一流的德国原装真空泵，真空度高，质量稳定，残氧量低。

Performance benefits

1.It adopts Mitsubishi PLC from Japan. The human-machine interaction is realized by PLC combined with touch screen. The actions and control parameters of each part can be set and modified via PLC..
2.Photo-electric tracking of the cover film pattern ensures the integrity of the packaging printing and the product yield.
3.The whole machine is made of 304 stainless steel with a stainless steel frame structure, which features higher strength, better stability and is less prone to deformation than aluminum plate splicing.
4.The sealing ring is integrally processed with imported silicone material,maintenance-free during its service life,and features a flat sealing surface.
5.The molds are made of six-series aluminum magnesium alloy with high strength,hard texture and corrosion resistance,and can be configured according to the user's box type.
6.The world-class German original vacuum pump is adopted,with high vacuum degree,stable quality and low residual oxygen content.

技术参数
Technical parameters

型号	Model	KBT-550/650
包装盒最大尺寸 mm（每次包装 6 盒）	Maximum size of packaging box(6 boxes per package)	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	300
包装速度（box/h）	Packaging speed	约 1400-1800
电源	Power supply(Customized)	380V/50HZ(可定制)
冷却水压力（Mpa）	Cooling water	≧ 0.15
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Total power	约 9.5
气体置换率	Gas replacement rate	99.5%
残氧量	Residual oxygen content	优于 0.5%
耗气量	Gas consumption	根据包装盒尺寸而定
机器重量（kg）	Total weight	约 1500
外形尺寸（mm）	Overall dimensions	约 6500×1200×1800







DRZ-420S
全自动连续拉伸膜真空包装机

FULLY AUTOMATIC CONTINUOUS THERMOFORMING VACUUM PACKAGING MACHINE











使用范围
Scope of Application

适用于对各种休闲食品、豆制品、肉制品、水产品、果蔬、酱菜、冷却肉、医药产品、五金元件、医疗器械等进行真空、充气、贴体包装。

They are suitable for vacuum, gas-flush and skin packaging of various leisure foods, soybean products, meat products, aquatic products, fruits and vegetables, pickles, chilled meat, pharmaceutical products, hardware, medical devices and instruments, etc.

控制系统
Control System

采用日本三菱可编程控制器控制，三菱伺服，三菱触摸屏及三菱温度模块等，全部采用日本、欧洲、中国台湾等电器。设有完善的安全保护措施，带有故障报警和解除故障分析原因及故障复位功能。

It adopts Japanese Mitsubishi PLC control, and is equipped with Mitsubishi servo drives, Mitsubishi touch screens, Mitsubishi temperature modules and other components. All electrical components are imported from Japan, Europe, and Taiwan, China. The machine is equipped with comprehensive safety protection measures and features functions such as fault alarm, troubleshooting, and fault reset.

技术参数
Technical parameters

名 称	Name	参 数
上膜宽（mm）	Top film width	396-397
下膜宽（mm）	Bottom film width	422-423
真空度（pa）	Vacuum degree	≤ 200
压缩空气（Mpa）	Compressed air	≧ 0.6 耗气量 0.9m³/min
动力接口（mm）	Power interface	Φ16PU 管 客户预留 4 分内丝接口
冷却水（Mpa）	Cooling water	≧ 0.15
电源（三相五线制）	Power supply	380V/50HZ
总功率（kW）	Total power	约 12-13
工作效率（min）	Work efficiency	4-6
外形尺寸（mm）	External dimension	5500×1100×2030

KBT-900
全自动连续封盒封碗包装机

FULLY AUTOMATIC CONTINUOUS TRAY AND BOWL SEALING PACKAGING MACHINE





设备简介

本系列设备适合于食品、熟卤食品（如卤味家禽、素食品）、盒饭、面包糕点等。经过封盒包装的食品，由于较好的保持了食品原有的口感、色泽、形状及营养，同时结合自身的食品工艺可达到较长的保鲜期。客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

Equipment introduction

This series of equipment is suitable for food, cooked brine food (such as braised poultry, vegetarian food), box lunch, bread and pastry, etc. The food packaged in sealed boxes can maintain the original taste, color, shape and nutrition of the food well, and can achieve a longer fresh-keeping period in combination with its own food technology. Customers can also customize the equipment by our company according to the actual situation of packaging shape and production demand.

性能优点

1、本机适合各式食品的盒式包装，封口包装、打码、包装成品。
2、采用日本三菱可编程序控制器（PLC）配合触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。
3、采用奥托尼克斯温度控制器控制温度，控温准确，分体式加热板，封口质量好，受热均匀，封口粘合度好。
4、整机模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。
5、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。
6、设备配有电源缺相、逆相保护器，防护门带防护开关。
7、密封圈采用进口硅脂加工，寿命终生免维护，封口花纹平整。
8、根据用户包装要求，可配备自动喷码、打码、激光喷码，贴标机等标识系统。

Performance benefits

1. This machine is suitable for box packaging, sealing , coding and general packaging of all kinds of food.
2. The Japanese Mitsubishi programmable controller (PLC) and touch screen are used to realize human-machine interface dialogue. The actions and control parameters of each part can be set and modified by PLC.
3. The temperature is controlled by the Otonix temperature controller. The temperature control is accurate. The split heating plate has good sealing quality, uniform heating and good sealing adhesion.
4. The mould of the whole machine is made of 6-series aluminum magnesium alloy with high strength, hard texture and corrosion resistance, which conforms to the standard of equipment selected for food hygiene.
5. The machine is constructed with 304 stainless steel and features a stable frame structure that is resistant to deformation.
6. The equipment is equipped with power phase loss and reverse phase protectors, and the protective door is equipped with a protective switch.
7. The sealing ring is treated with imported silicone grease, featuring maintenance-free performance and a smooth sealing surface.
8. According to the user's packaging requirements, it can be equipped with automatic code spraying, code printing, laser code spraying labeling machine and other identification systems.

技术参数
Technical parameters

型号	Model	KBT
包装盒最大尺寸（mm）	Maximum size of packaging box	定制
包装膜宽度（mm）	Packaging film width	定制
电源	Power supply	380V/50HZ
普包工作效率（box/h）	General contracting work efficiency	2400-3000（一出四）
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	约 10.5
机器重量 （kg）	Total weight	约 1800
外形尺寸（mm）	Overall dimensions	约 5200×1200×1700

KBT-1000
全自动连续真空气调包装机

FULL-AUTOMATIC CONTINUOUS VACUUM MODIFIED ATMOSPHERE PACKAGING MACHINE







康贝特机械
TEL：0536-6083899

设备简介

本系列设备适合于包装生鲜肉类、水产、熟卤食品（如卤味家禽、素食品）、盒饭、面包糕点等。经过气调包装的食品，由于较好的保持了食品原有的口感、色泽、形状及营养，同时结合自身的食品工艺可达到较长的保鲜期。客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

1、采用日本三菱可编程控制器，由可编程序控制器（PLC）配合触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改，控制运行动作，运行精准，性能稳定。
2、光电跟踪盖膜图案，确保包装印刷图案的完整，保证成品率。
3、整机采用 304 不锈钢，不锈钢框架结构，比铝板拼接强度高，稳定好，不易变形。
4、封口圈采用进口硅脂整体加工，寿命终生免维护，封口花纹平整。
5、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，可根据用户盒型配置。
6、采用世界一流的德国原装真空泵，真空度高，质量稳定，残氧量低。

Equipment introduction

This series of equipment is suitable for packaging fresh meat,aquatic products,cooked marinated food (such as braised poultry and vegetarian food),box meals,bread and pastry,etc.The modified atmosphere packaging food can maintain the original taste,color,shape and nutrition of the food well,and combine its own food technology to achieve a longer preservation period.Customers can also have the equipment customized by our company according to the actual situation of packaging shape and production demand.

1.Japanese Mitsubishi programmable controllers are adopted.The PLC and touch screen are used to realize human-machine interaction. The actions and control parameters of each part can be set and modified by PLC to control the operation action,with accurate operation and stable performance.
2.Photo-electric tracking of the cover film pattern ensures the integrity and accuracy of packaging printing patterns.
3.The whole machine adopts 304 stainless steel with a stainless steel frame structure, which features higher strength, better stability and is less prone to deformation than aluminum plate splicing.
4.The sealing ring is integrally processed with imported silicone grease,free of maintenance during its lifetime,and the sealing pattern is flat.
5.The molds are made of six-series aluminum magnesium alloy with high strength,hard texture and corrosion resistance,and can be configured according to the user's box type.
6.The world-class German original vacuum pump is adopted,with high vacuum degree,stable quality and low residual oxygen content.

技术参数
Technical parameters

型号	Model	KBT-1000
包装盒最大尺寸 mm（每次包装 6 盒）	Maximum size of packaging box(6 boxes per package)	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	300
包装速度（box/h）	Packaging speed	约 1400-1800
电源	Power supply	380V/50HZ（可定制）
冷却水压力（Mpa）	Cooling water	≧ 0.15
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	约 9.5
气体置换率	Gas replacement rate	99.5%
残氧量	Residual oxygen content	优于 0.5%
耗气量	Gas consumption	根据包装盒尺寸而定
机器重量（kg）	Total weight	约 1200
外形尺寸（mm）	Overall dimensions	约 4000×900×1800

MAP-1200
全自动转盘式真空气调包装机

FULL-AUTOMATIC ROTARY VACUUM MODIFIED ATMOSPHERE PACKAGING MACHINE

设备简介

本系列设备适合于包装生鲜肉类、水产、熟卤食品（如卤味家禽、素食品）、盒饭、面包糕点等。经过气调包装的食品，由于较好的保持了食品原有的口感、色泽、形状及营养，同时结合自身的食品工艺可达到较长的保鲜期。客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

Equipment introduction

This series of equipment is suitable for packaging fresh meat, aquatic products, cooked marinated food (such as braised poultry and vegetarian dishes), box meals, bread, pastries, etc.Modified atmosphere packaging can well preserve the original taste, color, shape and nutrition of food, and combined with our food processing technology, achieves a longer shelf life.Customers can also customize the equipment through our company according to their actual packaging shape and production requirements.




性能优点

1、采用日本三菱可编程序控制器（PLC）配合三菱触摸屏实现人机界面对话，
各部分动作及控制参数均可由 PLC 设定、修改。
2、采用奥托尼克斯温度控制器控制温度，控温准确，分体式加热板，封口质量好，受热均匀，封口粘合度好。
3、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。
4、光电跟踪盖膜图案 , 确保包装印刷图案的完整。
5、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。
6、设备配有电源缺相、逆相保护器。
7、密封圈采用进口硅脂整体加工，寿命终生免维护，封口花纹平整。
8、切刀结构设计精巧，采用合金刀片，寿命长更换方便。



技术参数
Technical parameters

型号	Model	MAP-1200
包装盒最大尺寸（mm）	Maximum size of packaging box	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	280
包装速度 （box/h）	Packaging speed	约 700-900
电源	Power supply	380V/50HZ
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	5.5
气体置换率	Gas replacement rate	≧ 99.5%
残氧量	Residual oxygen content	优于 0.5%
机器重量（kg）	Total weight	约 700

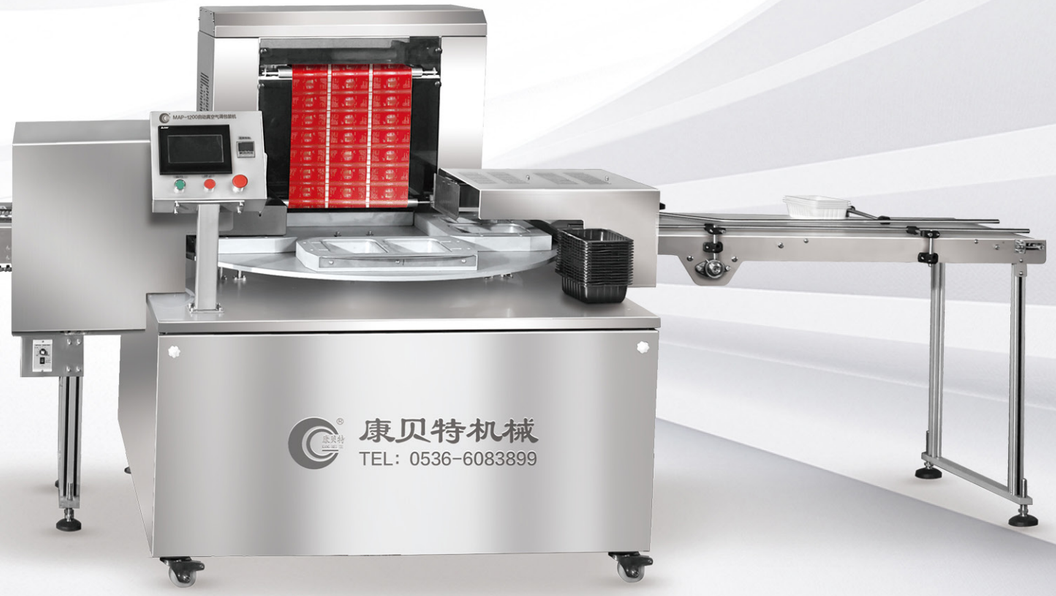

Performance benefits

1. The Japanese Mitsubishi programmable controller (PLC) and Mitsubishi touch screen are used to realize human-machine interface dialogue. The actions and control parameters of each part can be set and modified by PLC.
2. The temperature is controlled by the Otonix temperature controller with high precision.The split-type heating plate features excellent sealing performance, uniform heating and strong sealing adhesion.
3. The molds are made of six series aluminum magnesium alloy with high strength, hard texture, and corrosion resistance, meeting the standards for food hygiene equipment selection.
4. Photoelectric tracking of cover film patterns ensures the integrity of packaging printing patterns;
5. The whole machine is made of 304 stainless steel with a stable frame structure that is resistant to deformation.
6. The equipment is equipped with power phase loss and reverse phase protector.
7. The sealing ring is integrally processed with imported silicone grease, featuring a lifetime maintenance-free design and a flat sealing structure.
8. The cutter features an exquisite structural design. Equipped with an alloy blade, it boasts a long service life and allows for easy replacement.

MAP-450/550
双工位（单工位）真空气调包装机

TWO-STATION (SINGLE-STATION) VACUUM MODIFIED ATMOSPHERE PACKAGING MACHINE





设备简介

本系列设备适合于包装生鲜肉类、水产、熟卤食品（如卤味家禽、素食品）、果蔬、盒饭、面包糕点等。经过气调包装的食品，由于较好的保持了食品原有的口感、色泽、形状及营养，同时结合自身的食品工艺可达到较长的保鲜期。客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

Equipment introduction

This series of equipment is suitable for packaging fresh meat, aquatic products, cooked marinated food (such as braised poultry and vegetarian dishes), fruits and vegetables, boxed meals, bread and pastries, etc.Modified atmosphere packaging can well preserve the original taste, color, shape and nutrition of food, and combined with our food processing technology, achieve a longer shelf life.Customers can also customize the equipment through our company according to their actual packaging specifications and production requirements.

性能优点

1、采用日本三菱可编程序控制器（PLC）配合触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。
2、采用韩国奥托尼克斯温度控制器控制温度，控温准确，分体式加热板，封口质量好，受热均匀，封口粘合度好。
3、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。
4、光电跟踪盖膜图案 , 确保包装印刷图案的完整。
5、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。
6、采用世界一流的德国普旭真空泵，抽速快，质量稳定，残氧量低。
7、机器可多套模具使用，更换模具方便，整套模具更换只需 20 分钟内就可完成。

Performance benefits

1.The Japanese Mitsubishi programmable controller IPLC)and touch screen are used to realize human-machine interface dialogue.The actions and control parameters of each part can be set and modified by PLC.
2.Temperature is controlled by a Korean Autonics temperature controller, ensuring precise temperature control.The split-type heating plate features excellent sealing performance, uniform heating and strong sealing adhesion.
3.The molds are made of high-strength six-series aluminum-magnesium alloy, featuring high rigidity and excellent corrosion resistance, which meets the food hygiene standards for equipment.
4.Photoelectric tracking of the cover film pattern ensures the integrity of the printed packaging pattern.
5.The whole machine is made of 304 stainless steel, with a stable frame structure that is not easy to deform.
6.It adopts a world-class German Busch vacuum pump, featuring fast pumping speed, stable performance and low residual oxygen content.
7.The machine can be used with multiple sets of molds,which are convenient to replace.The entire mold set can be replaced within 20 minutes.

技术参数
Technical parameters

型号	Model	MAP-450/550
包装盒最大尺寸（mm	Maximum size of packaging box	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	280
包装速度 （box/h）	Packaging speed	约 700-900
电源	Power supply	380V/50HZ
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	5.5
气体置换率	Gas replacement rate	≧ 99.5%
残氧量	Residual oxygen content	优于 0.5%
机器重量 （kg）	Total weight	约 700

VSP-750
全自动连续真空贴体包装机

INTELLIGENT CONTINUOUS VACUUM SKIN PACKAGING MACHINE





设备简介

真空贴体包装是利用正负压差的作用，将贴体膜预热贴合放好产品的托盘上，具有三维立体的展示效果，同时对产品有全密封，高阻隔的作用，适用于牛肉、牛排、冷鲜肉、水产类、火腿类等产品的包装。

Equipment introduction

Vacuum skin packaging is a multi-purpose packaging method that uses positive and negative pressure differences to preheat and fit the film closely onto products and trays, creating a 3D display effect.It provides full sealing and high barrier protection, and is suitable for packaging beef, steak, chilled fresh meat, aquatic products, ham and other food products.

性能优点

1、采用日本三菱可编程序控制器（PLC）配合三菱触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。
2、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。
3、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。
4、采用世界一流的德国普旭真空泵，抽速快，质量稳定，残氧量低。
5、机器可多套模具使用，更换模具方便，整套模具更换只需 20 分钟内就可完成。

Performance benefits

1. The Japanese Mitsubishi programmable controller (PLC) and Mitsubishi touch screen are used to realize human-machine interface dialogue. The actions and control parameters of each part can be set and modified by PLC.
2. The molds are made of six-series aluminum magnesium alloy, with high strength, hard texture and corrosion resistance, and comply with the standards for food hygiene equipment.
3. The whole machine is made of 304 stainless steel , and the frame structure is stable and not easy to deform.
4. It adopts a world-class German Busch vacuum pump, featuring fast pumping speed, stable performance and low residual oxygen content.
5. The machine can be used with multiple sets of molds, which is convenient to replace. The replacement of the whole set of molds can be completed within 20 minutes.


技术参数
Technical parameters

型号	Model	VSP-750
包装盒最大尺寸（mm）	Maximum size of packaging box	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	280
包装速度（box/h）	Packaging speed	约 700-1000（以托盘尺寸为准）
电源	Power supply	380V/50HZ
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	12
抽气速率	Pumping rate	200m³/h
机器重量（kg）	Total weight	约 1000

VSP-1200
全自动转盘式连续真空贴体包装机

FULL-AUTOMATIC ROTARY TYPE CONTINUOUS VACUUM SKIN PACKAGING MACHINE



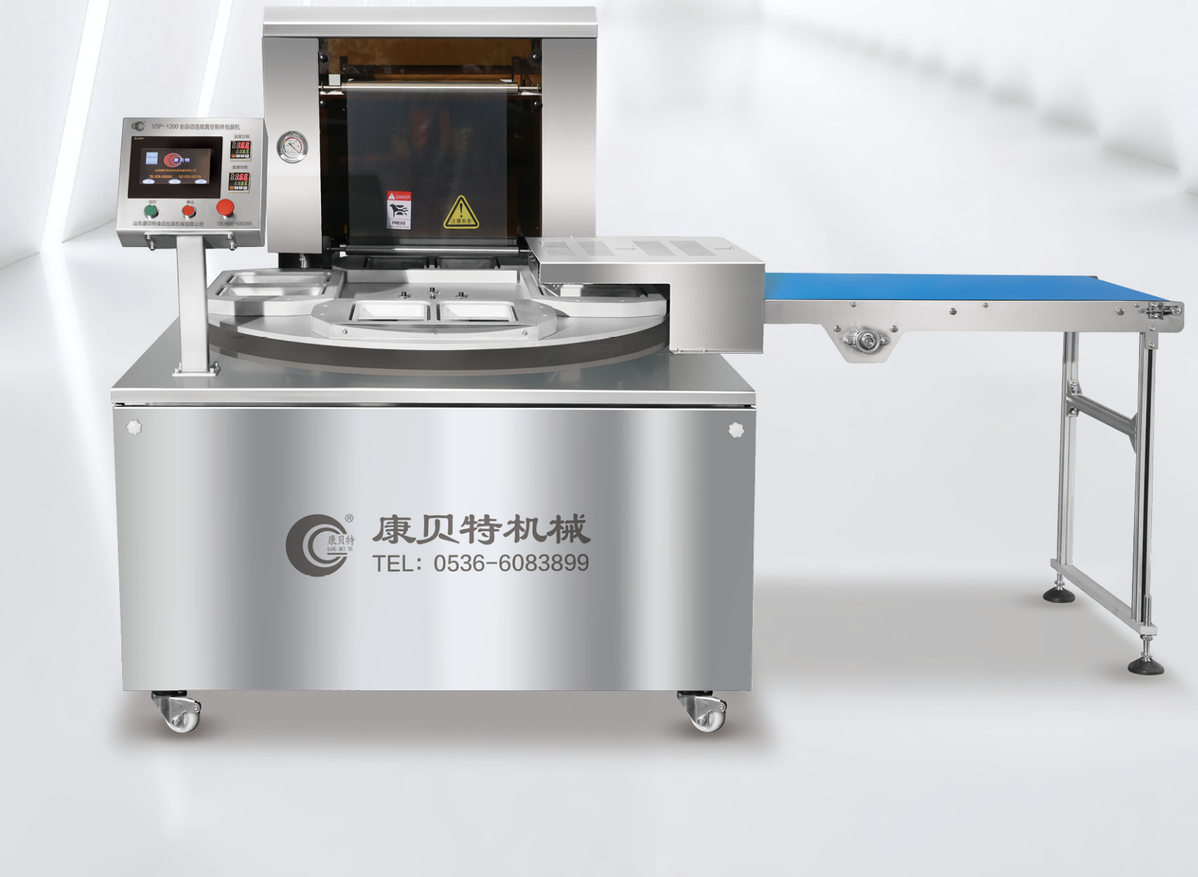







设备简介

真空贴体包装是利用正负压差的作用，将贴体膜预热贴合放好产品的托盘上，具有三维立体的展示效果，同时对产品有全密封，高阻隔的作用，适用于牛肉、牛排、冷鲜肉、水产类、火腿类等产品的包装。

Equipment introduction

Vacuum body-fitting packaging is a multi-purpose packaging method that uses positive and negative pressure differences to preheat and fit the body-fitting film onto the product tray, creating a three-dimensional display effect.It provides a complete seal and high barrier protection for the product, and is suitable for packaging beef, steak, chilled fresh meat, aquatic products, ham and other items.

性能优点

1、采用日本三菱可编程序控制器（PLC）配合三菱触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。

2、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。

3、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。

4、采用世界一流的德国普旭真空泵，抽速快，质量稳定，残氧量低。

Performance benefits

1.The Japanese Mitsubishi programmable controller PLC and Mitsubishi touch screen are used to realize human-machine interface dialogue.The actions and control parameters of each part can be set and modified by PLC.

2.The molds are made of 6-series aluminum-magnesium alloy, featuring high strength, hardness and corrosion resistance, and comply with food equipment hygiene standards.

3.The whole machine is made of 304 stainless steel,and the frame structure is stable and not easy to deform.


4.It adopts a world-class German Busch vacuum pump, featuring fast pumping speed, stable performance and low residual oxygen content.

技术参数
Technical parameters

型号	Model	VSP-1200
包装盒最大尺寸（mm）	Maximum size of packaging box	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	280
包装速度（box/h）	Packaging speed	约 500-700（以托盘尺寸为准）
电源	Power supply	380V/50HZ
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	7.5
真空抽气速率	Vacuum Pumping Rate	200m³/h
机器重量（kg）	Total weight	约 700

VSP-450/550
立式真空贴体单、双工位包装机

INTELLIGENT VACUUM SKIN PACKAGING MACHINE (DOUBLE STATION, SINGLE STATION)

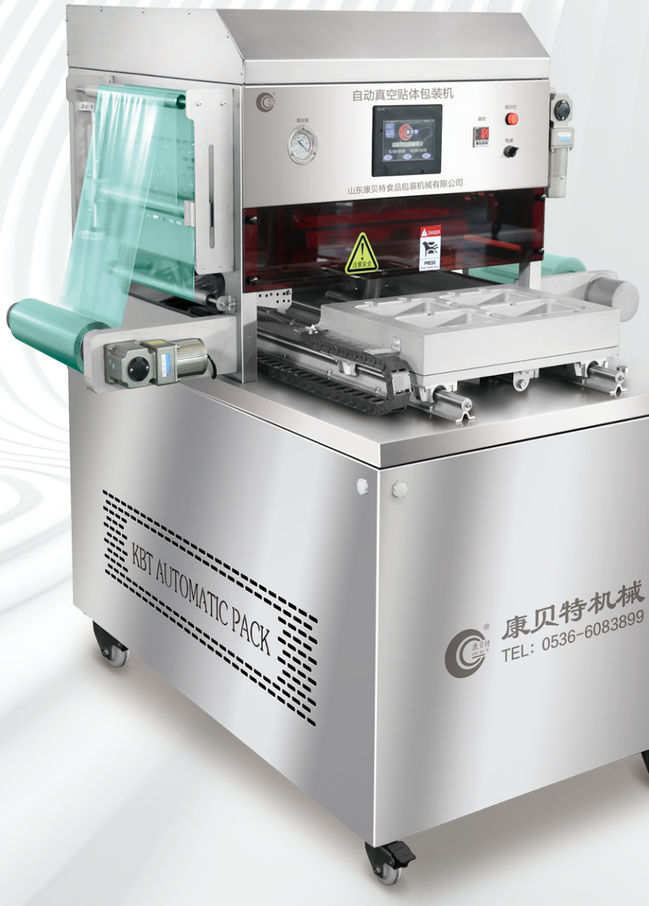





设备简介

本系列设备适合于包装生鲜肉类、水产、熟卤食品（如卤味家禽、素食品）、果蔬、盒饭、面包糕点等。经过贴体包装的食品，由于较好的保持了食品原有的口感、色泽、形状及营养，同时结合自身的食品工艺可达到较长的保鲜期。客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

Equipment introduction

This series of equipment is suitable for packaging fresh meat, aquatic products, cooked marinated food (such as marinated poultry and vegetarian products), fruits and vegetables, boxed meals, bread, pastries, etc.Food with tight packaging can preserve its original taste, color, texture and nutrition. Combined with professional food processing technology, it achieves a longer shelf life.Customers can also customize the equipment according to their packaging formats and actual production requirements.

性能优点

1、采用日本三菱可编程序控制器（PLC）配合三菱触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。
2、采用奥托尼克斯温度控制器控制温度，控温准确，分体式加热板，封口质量好，受热均匀，封口粘合度好。
3、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。
4、光电跟踪盖膜图案 , 确保包装印刷图案的完整。
5、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。
6、采用世界一流的德国普旭真空泵，抽速快，质量稳定，残氧量低。
7、机器可多套模具使用，更换模具方便，整套模具更换只需 20 分钟内就可完成。

Performance benefits

1. The Japanese Mitsubishi programmable controller (PLC) and Mitsubishi touch screen are used to realize human-machine interface dialogue. The actions and control parameters of each part can be set and modified by PLC.
2. The temperature is controlled by the Otonix temperature controller. The temperature control is accurate. The split heating plate has good sealing quality, uniform heating and good sealing adhesion.
3. The molds are made of 6-series aluminum magnesium alloy with high strength, high hardness, and corrosion resistance, meeting the standards for food hygiene equipment selection.
4. Photoelectric tracking of the cover film pattern ensures the integrity of printed packaging patterns.
5. The whole machine is made of 304 stainless steel , and the frame structure is stable and not easy to deform.
6. World-class German Busch vacuum pump is adopted, with fast pumping speed, stable quality and low residual oxygen content.
7. The machine can be used with multiple sets of molds, which is convenient to replace. The replacement of the whole set of molds can be completed within 20 minutes.


技术参数
Technical parameters

型号	Model	VSP-450/550
包装盒最大尺寸（mm）	Maximum size of packaging box	定制
卷膜最大宽度（mm）	Maximum width of roll film	定制
卷膜最大直径（mm）	Maximum diameter of roll film	280
包装速度（box/h）	Packaging speed	约 400-600
电源	Power supply(customized)	380V/50HZ（可定制）
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	5.5
真空速率	Vacuum Speed	200m^3/h
机器重量（kg）	Total weight	约 700

KBT-1200
转盘式连续铝箔盒封口机

ROTARY TYPE CONTINUOUS ALUMINUM FOIL TRAY SEALING MACHINE



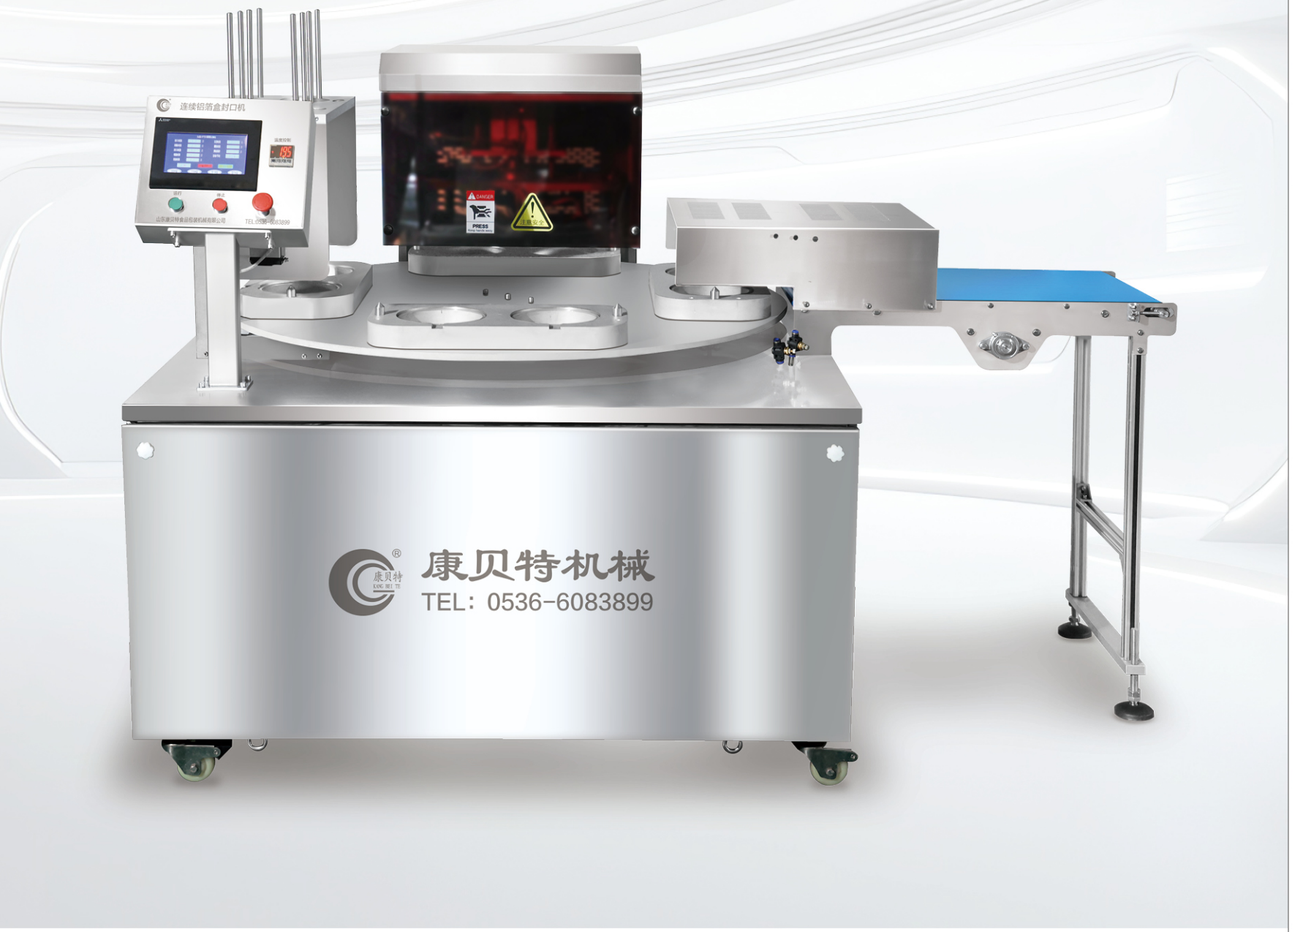







设备简介

本系列设备最适合于包装冷冻水产、熟卤食品（如卤味家禽、素食品）、盒饭、面包糕点等。经过封盒包装的食品，由于较好的保持了食品原有的口感、色泽、形状及营养，客户也可根据包装物形状及产量需求的实际情况由我司量身定制设备。

Equipment introduction

This series of equipment is ideal for packaging frozen aquatic products, cooked marinated foods (such as braised meats and vegetarian dishes), boxed meals, bread, pastries, etc.By preserving the original taste, color, texture and nutrition of food in sealed containers, it delivers excellent packaging results.Customers can also customize the equipment through our company according to their actual packaging specifications and production requirements.

性能优点

1、采用日本三菱可编程序控制器（PLC）配合三菱触摸屏实现人机界面对话，各部分动作及控制参数均可由 PLC 设定、修改。
2、模具均采用六系铝镁合金制造，强度高质地坚硬耐腐蚀，符合食品卫生选用设备标准。
3、整机采用 304 不锈钢制作，框架结构，稳定好，不易变形。
4、采用世界知名品牌 AIRTAC 气动元件。

Performance benefits

1. The Japanese Mitsubishi programmable controller (PLC) and Mitsubishi touch screen are used to realize human-machine interface dialogue. The actions and control parameters of each part can be set and modified by PLC.
2. The molds are made of six-series aluminum magnesium alloy, with high strength, high hardness and corrosion resistance, and comply with the standards for food hygiene equipment.
3. The whole machine is made of 304 stainless steel, and the frame structure is stable and not easy to deform.
4. The world famous brand AIRTAC pneumatic components are adopted.

技术参数
Technical parameters

型号	Model	KBT-1200
包装盒最大尺寸（mm）	Maximum size of packaging box	定制
包装速度（box/h）	Packaging speed	约 700-900（以托盘尺寸为准）
电源	Power supply	380V/50HZ
工作气压（Mpa）	Working air pressure	0.6-0.8
总功率（kW）	Aggregate capacity	3.2
机器重量（kg）	Total weight	约 500

DZ-1000/1100
全自动连续滚动包装机（双封条）

FULL-AUTOMATIC CONTINUOUS ROLLING PACKAGING MACHINE (DOUBLE SEAL)







设备简介

1、双封连续滚动式真空包装机是本公司在单封条的基础上改进并提高生产效率的一种新型设备。
2、本机的外表全部采用优质不锈钢制作，工作室台板采用不锈钢厚度为 8mm，边箱采用 3mm 不锈钢制作，并通过特殊的加强处理，长期使用不会变形等特点。
3、采用不锈钢大扣链条、进口输送带、定位器系统，保证了输送带定位准确，不易错位，封口精度高、升降平稳、噪音故障率低等显著特点。
4、配德国原装进口普旭 100、240 型泵，该泵具有性能稳定、抽气速率快、噪音低、真空度高等优点。
5、采用大口径 40 型真空截止阀，具有抽气速率快、真空度高、不易损坏等特点。
6、公司研发的加热系统，双封和单封加热可自由选择达到节能，通过特殊处理，具备重叠包装能力，生产过程中不易损坏，封口平整、不打折、不起皱，是我公司克服的技术难点。

Equipment introduction

1. The double-seal continuous rolling vacuum packaging machine is a new type of equipment improved and developed by our company on the basis of the single-seal model, with higher production efficiency.
2.The entire frame surface is made of high-quality stainless steel.The working chamber platen adopts 8 mm thick stainless steel, and the side cabinets use 3 mm stainless steel with special reinforcement treatment, ensuring no deformation during long-term use.
3. It is equipped with high-strength stainless steel chains, imported conveyor belts and a positioning system, ensuring accurate positioning, no misalignment, high sealing precision, stable lifting, low noise and low failure rate.
4.Equipped with original Germanyimported BUSCH 100/240 vacuum pumps, featuring stable performance, fast pumping speed, low noise and high vacuum degree.
5.Equipped with a large-caliber Type 40 vacuum stop valve, featuring fast pumping speed, high vacuum degree and high durability.
6.The independently developed heating system features optional double sealing or single sealing heating modes, enabling energy conservation. With special treatment, the system supports overlapping packaging and ensures stable performance without damage during production.The seal is smooth and wrinkle-free, representing a key technological breakthrough achieved by our company.

设备用途

适用于各种产品及酱菜、蔬菜、鸡蛋、鸡产品、海产品、冷冻产品、肉制品等包装。

Equipment application


The equipment is suitable for packaging a wide range of products, including pickles, vegetables, eggs, poultry products, frozen products, meat products, etc.

技术参数
Technical parameters

型号	Model	DZ-1000/1100
真空室尺寸	Vacuum chamber size	1120×530mm×100mm
封口线尺寸	Sealing line size	1000mm×8mm×2
包装能力	Packaging capacity	2-5 次 / 分钟
真空泵	Vacuum pump	100-200m^3/h
电　源	Power supply(customized)	380V/50HZ（可定制）
外型尺寸	Overall dimensions	1580mm×1800mm×1300mm

DZ-1000/1100
全自动连续滚动包装机（单封条）

FULL-AUTOMATIC CONTINUOUS ROLLING PACKAGING MACHINE (SINGLE SEAL)

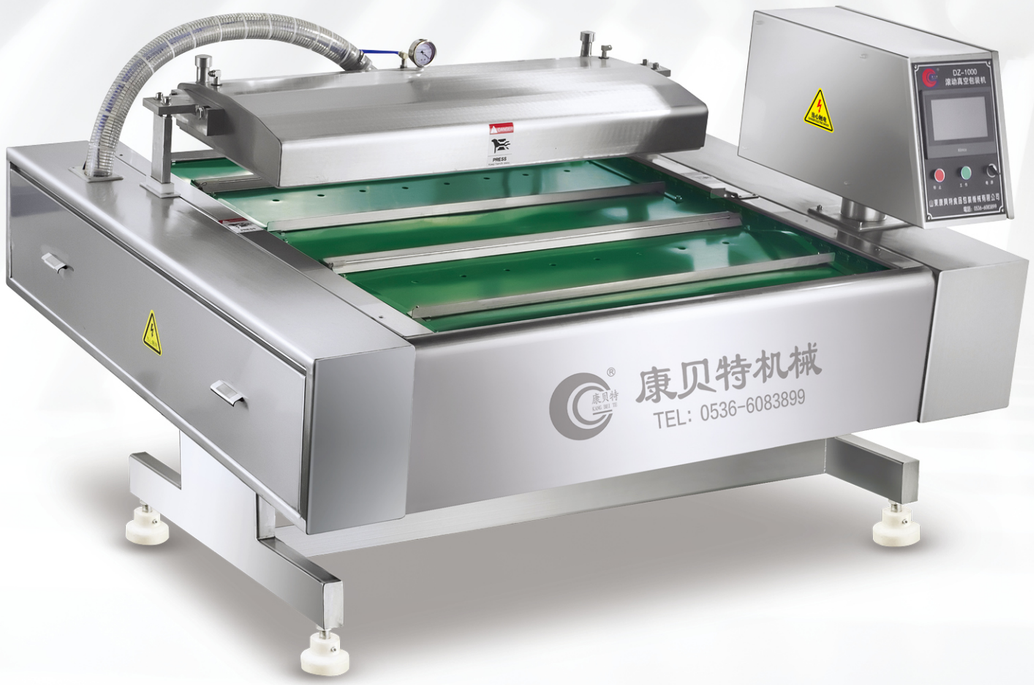





设备简介

1、单封连续滚动真空包装机采用优质不锈钢制作，工作室台板采用不锈钢厚度为 8mm，边箱采用 3mm 不锈钢制作，并通过特殊的加强处理，长期使用不会变形等特点。
2、采用不锈钢大扣链条、进口输送带、定位器系统，保证了输送带定位准确，不易错位，封口精度高、升降平稳、噪音故障率低等显著特点。
3、配德国原装进口普旭 100、240 泵，该泵具有性能稳定、抽气速率快、噪音低、真空度高等优点。
4、采用大口径真空截止阀，具有抽气速率快、真空度高、不易损坏等特点。
5、公司研发的加热系统，加热系统具备重叠包装能力，生产过程中不易损坏，封口平整，不打折、不起皱，是我公司克服的技术难点。

Equipment introduction

1.The single-seal continuous rolling vacuum packaging machine is made of high-quality stainless steel. The worktable platen is 8mm thick stainless steel, and the side boxes are made of 3mm stainless steel. With special reinforcement treatment, it will not deform after long-term use.
2.Equipped with large stainless steel chains, imported conveyor belts and a positioning system, the machine ensures accurate positioning, no misalignment, high sealing precision, stable lifting, low noise and low failure rate.
3.It is equipped with original German imported BUSCH 100 and 240 vacuum pumps, featuring stable performance, fast pumping speed, low noise and high vacuum degree.
4.Equipped with a large-caliber vacuum stop valve, it features fast pumping speed, high vacuum degree and high durability.
5.The heating system developed by our company features overlapping sealing performance.It is not prone to damage during production, and the seal is smooth and wrinkle-free.These are the key technical difficulties overcome by our company.

设备用途

适用于各种产品及酱菜、蔬菜、鸡蛋、鸡产品、海产品、冷冻产品、肉制品等包装。

Equipment application

The equipment is suitable for packaging a wide range of products, including pickles, vegetables, eggs, poultry products, frozen products, meat products, etc.

技术参数
Technical parameters


型号	Model	DZ-1000/1100
真空室尺寸	Vacuum chamber size	1120mm×445mm×90mm
封口线尺寸	Sealing line size	1000mm×8mm
包装能力	Packaging capacity	2-5 次 / 分钟
真空泵	Vacuum pump	100-200m^3/h
电　源	Power supply	380V/50HZ
外型尺寸	Overall dimensions	1540mm×1800mm×1300mm

DZ-800/2S(A/B)
全自动真空包装机

FULL-AUTOMATIC VACUUM PACKAGING MACHINE






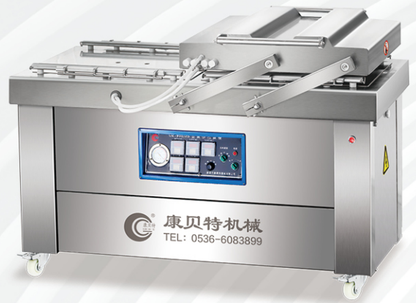

技术参数 Technical parameters

真空室尺寸	Vacuum chamber size	920×780×220mm
封口尺寸	Seal size	800×10/2mm
包装能力	Packing capacity	2-5 次 / 分钟
电源	Power supply	380V/50HZ 6.5KW
外型尺寸	Overall dimensions	1835×910×1060mm

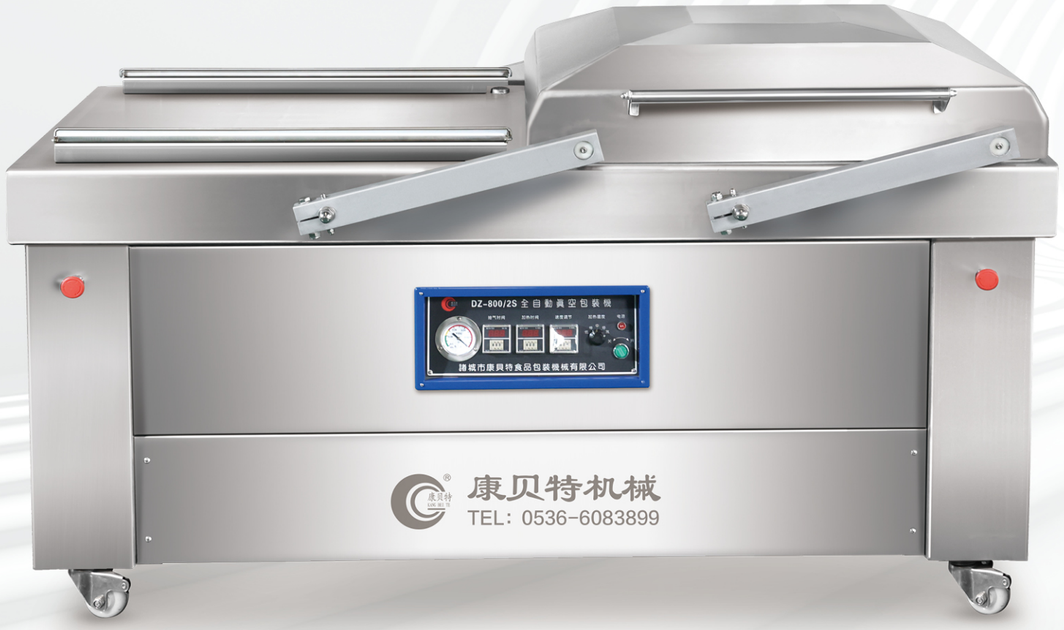

DZ-700/2S
大包装物真空包装机

LARGE PRODUCTS VACUUM PACKAGE MACHINE


设备简介 Equipment introduction

本设备工作室、工作台采用 304 不锈钢制作，板材厚 4 毫米，具有不怕腐蚀不变形的特点。
配德国原装进口 BUSCH100 型真空泵，该泵具有性能稳定，真空度高，抽气速度快，噪音低等特点。该机采用康贝特专用时间继电器，正泰交流接触器，经过特殊防水处理，延长其使用寿命。

技术参数 Technical parameters

真空室尺寸	Vacuum chamber size	720×620×90mm
封口尺寸	Seal size	600×4×8/10
包装能力	Packing capacity	3-5 次 / 分钟
电源	Power supply	380V/50HZ 2.2kW
外型尺寸	Overall dimensions	1420×800×950mm
备注	Remarks	全自动、半自动两种，适合小包装

The equipment's workroom and worktable are made of 4 mm thick 304 stainless steel, featuring corrosion resistance and deformation resistance.It is equipped with an original imported BUSCH 100 vacuum pump from Germany, which delivers stable performance, high vacuum degree, fast pumping speed and low noise.This machine uses Kangbeite special time relays and Chint AC contactors. All components have undergone special waterproof treatment to effectively extend service life.

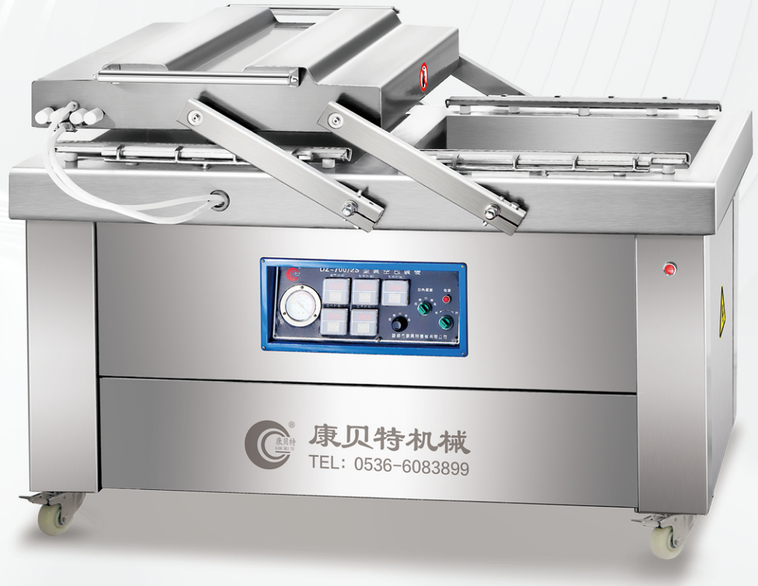

DZ-600/2S
真空包装机
VACUUM PACKAGE MACHINE


设备简介 Equipment introduction

本设备工作室、工作台采用 304 不锈钢制作，板材厚 4 毫米，具有不怕腐蚀不变形的特点。
配德国原装进口 BUSCH100 型真空泵，该泵具有性能稳定，真空度高，抽气速度快，噪音低等特点。该机采用康贝特专用时间继电器，正泰交流接触器，经过特殊防水处理，延长其使用寿命。

技术参数 Technical parameters

真空室尺寸	Vacuum chamber size	690×620×160mm
封口尺寸	Seal size	600×10/2mm
包装能力	Packing capacity	3-5 次 / 分钟
电源	Power supply	380V/50HZ 2.2kW
外型尺寸	Overall dimensions	1400×720×950mm

The equipment's chamber and worktable are made of 304 stainless steel with a thickness of 4 mm, featuring corrosion and deformation resistance.
Equipped with Germany's original imported BUSCH100 vacuum pump,this pump has stable performance,high vacuum,fast pumping speed,low noise,and other characteristics.This machine is equipped with Kangbeite dedicated time relays and Chint AC contactors, and has undergone special waterproof treatment to extend its service life.

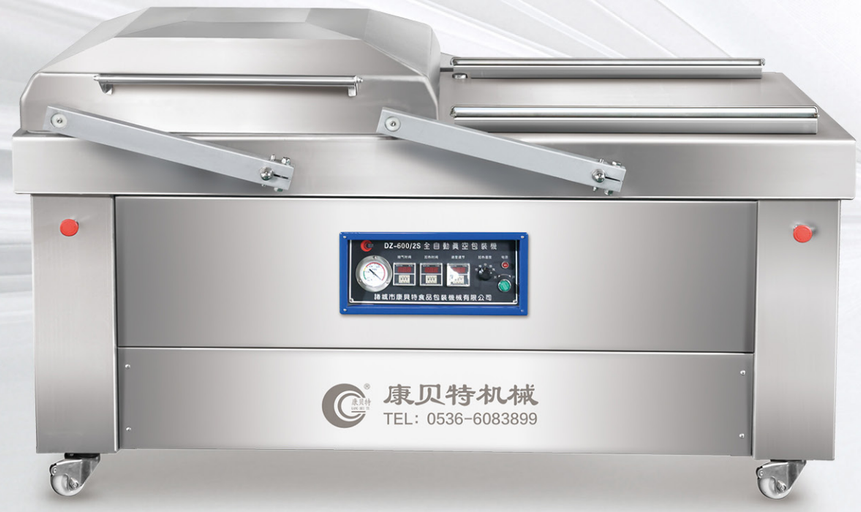

DZ-600/4S
四封条真空包装机
FOUR-SEAL VACUUM PACKAGING MACHINE

设备简介 Equipment introduction

本设备工作室、工作台采用 304 不锈钢制作，板材厚 4 毫米，具有不怕腐蚀不变形的特点。
配德国原装进口 BUSCH100 型真空泵，该泵具有性能稳定，真空度高，抽气速度快，噪音低等特点。该机采用康贝特专用时间继电器，正泰交流接触器，经过特殊防水处理，延长其使用寿命。

技术参数 Technical parameters

真空室尺寸	Vacuum chamber size	690×620×160mm
封口尺寸	Seal size	600×10/2mm
包装能力	Packing capacity	2-4 次 / 分钟
电源	Power supply	380V/50HZ 5kW
外型尺寸	Overall dimensions	1400×720×950mm

The chamber and worktable of the equipment are made of 4 mm thick 304 stainless steel, featuring corrosion resistance and deformation resistance.
It is equipped with an original German BUSCH 100 vacuum pump, which features stable performance, high vacuum degree, fast pumping speed and low noise.This machine uses special Kangbeite time relays and Chint AC contactors. The whole machine has undergone special waterproof treatment to extend its service life.



After-sale service

售后服务及承诺



- 服务宗旨：快速、果断、准确、周到、彻底
- 服务目标：服务质量赢得用户满意
- 服务效率：保修期内或保修期外设备出现故障，供方在接到通知后，如电话沟通不能解决，24 小时内派出维修人员到现场维修。
- 服务原则：产品保修期为十二个月，在保修期内供方将免费维修和更换属质量原因造成的零部件损坏，保修期外零部件的损坏，提供的配件只收取成本费，由需方人为因素造成的设备损坏，供方维修或提供的配件均按成本价计。
- 在保修期外我公司技术人员每年不少于三次回访调查用户使用情况。

● Service aim: fast, decisive, accurate, considerate, thorough
● Service target: service quality win users' satisfaction
● Service efficiency: Whether the equipment breaks down within or beyond the warranty period, if the problem cannot be resolved by telephone, our service personnel will be dispatched to provide on-site service promptly after we receive your notification.
● Service principle: The product warranty period is 12 months.Within the warranty period, the supplier will repair or replace defective components free of charge.
For component damage occurring outside the warranty period, the supplier will provide replacement parts at cost price.For equipment damage caused by human error or improper operation by the customer, the supplier will also provide parts and maintenance services at cost price.
● After the warranty period, our technicians will conduct at least three follow-up visits annually to check the users' equipment operation.

我们专注于食品包装机械领域，为您提供从单机设备到整线规划，一站式完整包装解决方案。

We specialize in the field of food packaging machinery, providing you with one-stop complete packaging solutions from single machines to full-line planning.

依托成熟的技术与丰富的行业经验，可根据不同食品品类、生产产能、车间布局及工艺要求，提供定制化设计、设备选型、生产安装、调试培训、售后维护全流程服务。

Relying on mature technology and extensive industry experience, we can provide a full-process service including customized design, equipment selection, production and installation, commissioning and training, as well as after-sales maintenance, in accordance with different food categories, production capacity, workshop layout and process requirements.

